


# "Driveway" with Fixodrive® FX 50

## Detail:

### Edging between Driveway and Vegetation

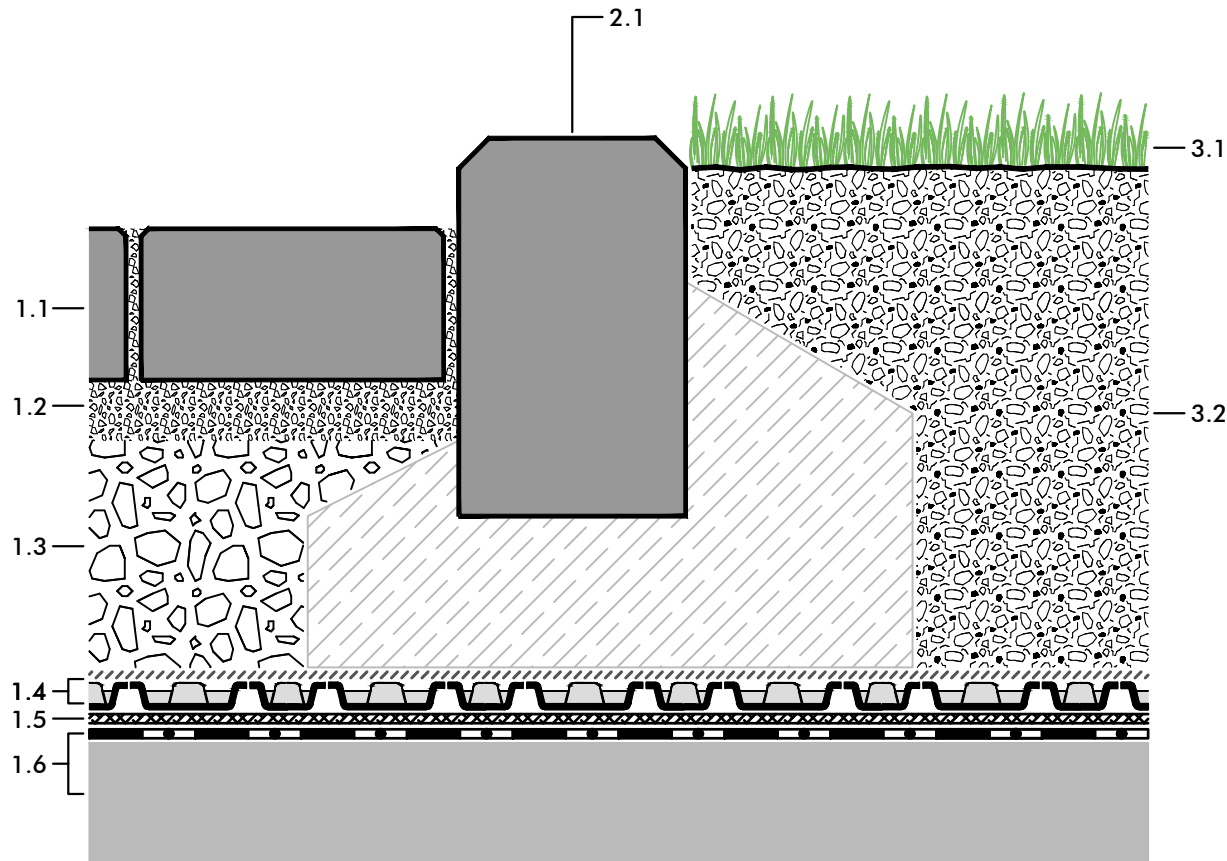

2.1 Concrete kerb in reinforced concrete foundation

3.1 Lawn, perennials, with sufficient substrate depth also shrubs and small trees

3.2 System substrate "Roof Garden" or System substrate "Lawn", from 200 mm, for a total substrate depth of more than 350 mm with Zincolit® Plus as mineral sub-substrate

## System build-up

1.1 Paving, e.g. concrete pavers

Depth:  $\geq 100$  mm for cars up to 3 t  
 $\geq 120$  mm for lorries up to 16 t  
 $\geq 140$  mm for lorries exceeding 16 t

1.2 Bedding layer, poor in lime, 30-50 mm

1.3 Gravel base layer, poor in lime

Depth:  $\geq 150$  mm for cars up to 3 t  
 $\geq 200$  mm for lorries up to 16 t  
 $\geq 250$  mm for lorries exceeding 16 t

1.4 Fixodrive® FX 50 with attached filter sheet

1.5 Filter Sheet PV

1.6 Roof construction with root resistant waterproofing

## Note:

The detailed solution shown here refers mainly to the ZinCo System Build-up. The roof construction itself as well as any other constructions are shown schematically and must be planned according to the relevant standards and guidelines.

## Project:

-

## Version:

27.11.2018 EVo / JGI -  
 Abgr01\_G+F\_FX50\_Fd1.dwg

## Reviewed:

-

## Scale:

none

## Size:

A 4

Authorized by ZinCo GmbH, Lise-Meitner-Str. 2,  
 72622 Nuertingen/ Germany; Tel: + +49/7022-6003-0  
 info@zinco-greenroof.com; www.zinco-greenroof.com

Subject to technical alterations and printing errors.

