

"Driveway" with Protectodrain® PD 250

Detail:

Edging between Driveway and Vegetation

System build-up

- 1.1 Paving, e.g. concrete pavers
Depth: ≥ 100 mm for cars up to 3 t
 ≥ 120 mm for lorries up to 16 t
 ≥ 140 mm for lorries exceeding 16 t
- 1.2 Bedding layer, poor in lime, 30-50 mm
- 1.3 Gravel base layer, poor in lime
Depth: ≥ 150 mm for cars up to 3 t
 ≥ 200 mm for lorries up to 16 t
 ≥ 250 mm for lorries exceeding 16 t
- 1.4 Filter Sheet PV
- 1.5 Protectodrain® PD 250
- 1.6 Slip Sheet TGF 20 (2 layers)
- 1.7 Roof construction with root resistant waterproofing

Note:


The detailed solution shown here refers mainly to the ZinCo System Build-up. The roof construction itself as well as any other constructions are shown schematically and must be planned according to the relevant standards and guidelines.

Project:

-

Version: 26.11.2018 **Reviewed:** EVo/ JGI **Scale:** none **Size:** A 4

Abgr01_G+F_PD250_Fd.dwg

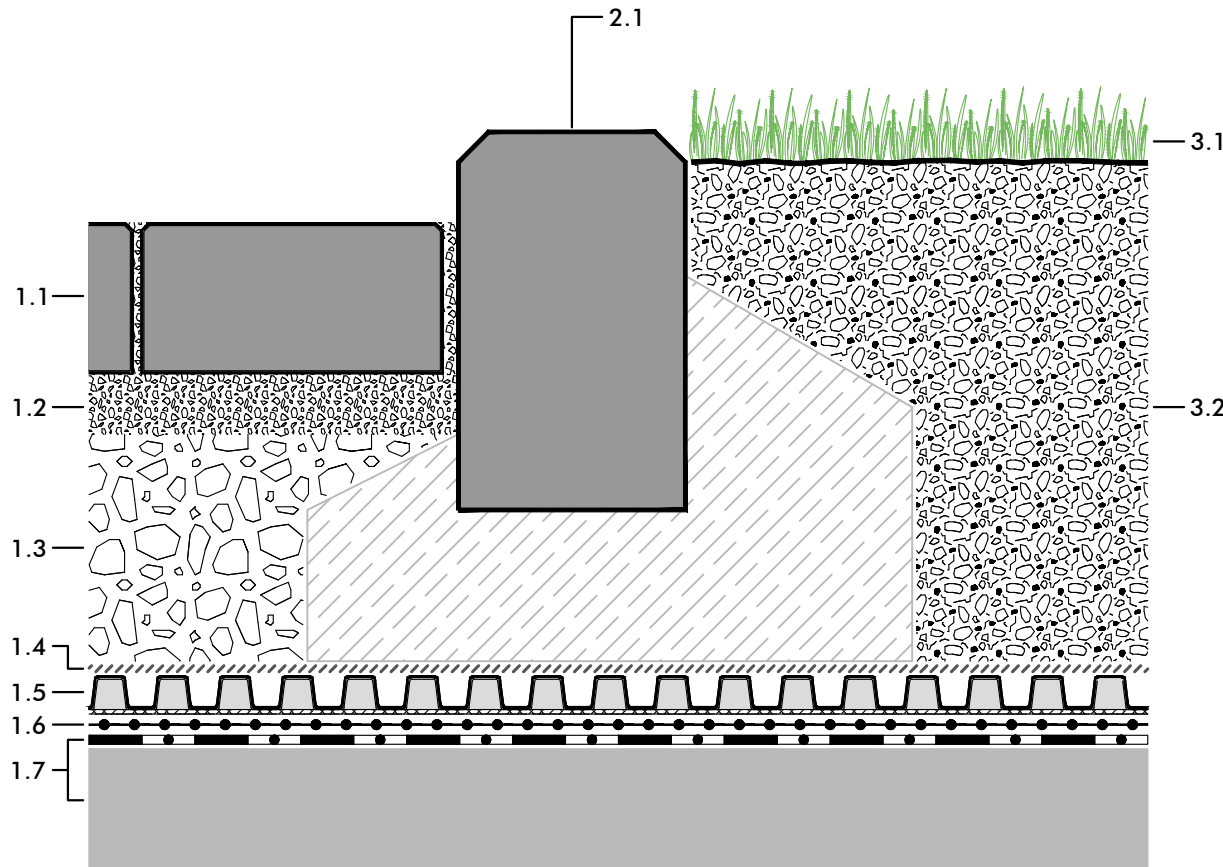

2.1 Concrete kerb in reinforced concrete foundation

3.1 Lawn, perennials, with sufficient substrate depth also shrubs and small trees

3.2 System substrate "Roof Garden" or System substrate "Lawn", from 200 mm for a total substrate depth of more than 350 mm with Zincolit® Plus as mineral sub-substrate

Authorized by ZinCo GmbH, Lise-Meitner-Str. 2,
72622 Nuertingen/ Germany; Tel: + +49/7022-6003-0
info@zinco-greenroof.com; www.zinco-greenroof.com

Subject to technical alterations and printing errors.

