

"Driveway" with Retention Spacer RSX 65

Detail:
Edging between Hard Landscape and Vegetation

System build-up

- 1.1 Paving, e.g. concrete pavers
Depth: ≥ 100 mm for cars up to 3 t
 ≥ 120 mm for lorries up to 16 t
 ≥ 140 mm for lorries exceeding 16 t
- 1.2 Bedding layer, stone chippings, poor in lime, 30-50 mm
- 1.3 Gravel base layer, poor in lime
Depth: ≥ 150 mm for cars up to 3 t
 ≥ 200 mm for lorries up to 16 t
 ≥ 250 mm for lorries exceeding 16 t
- 1.4 Filter Sheet PV
- 1.5 Retention Spacer RSX 65
- 1.6 Filter Sheet PV
- 1.7 Roof construction with root resistant waterproofing

Note:

The detailed solution shown here refers mainly to the ZinCo System Build-up. The roof construction itself as well as any other constructions are shown schematically and must be planned according to the relevant standards and guidelines.

Project:


-

Version: 18.12.2018 **Reviewed:** EVo / JGI - **Scale:** none **Size:** A 4

Abgr01_G+F_RSX65_Fd0.dwg

Authorized by ZinCo GmbH, Lise-Meitner-Str. 2,
72622 Nuertingen/ Germany; Tel: +49/7022-6003-0
info@zinco-greenroof.com; www.zinco-greenroof.com

Subject to technical alterations and printing errors.

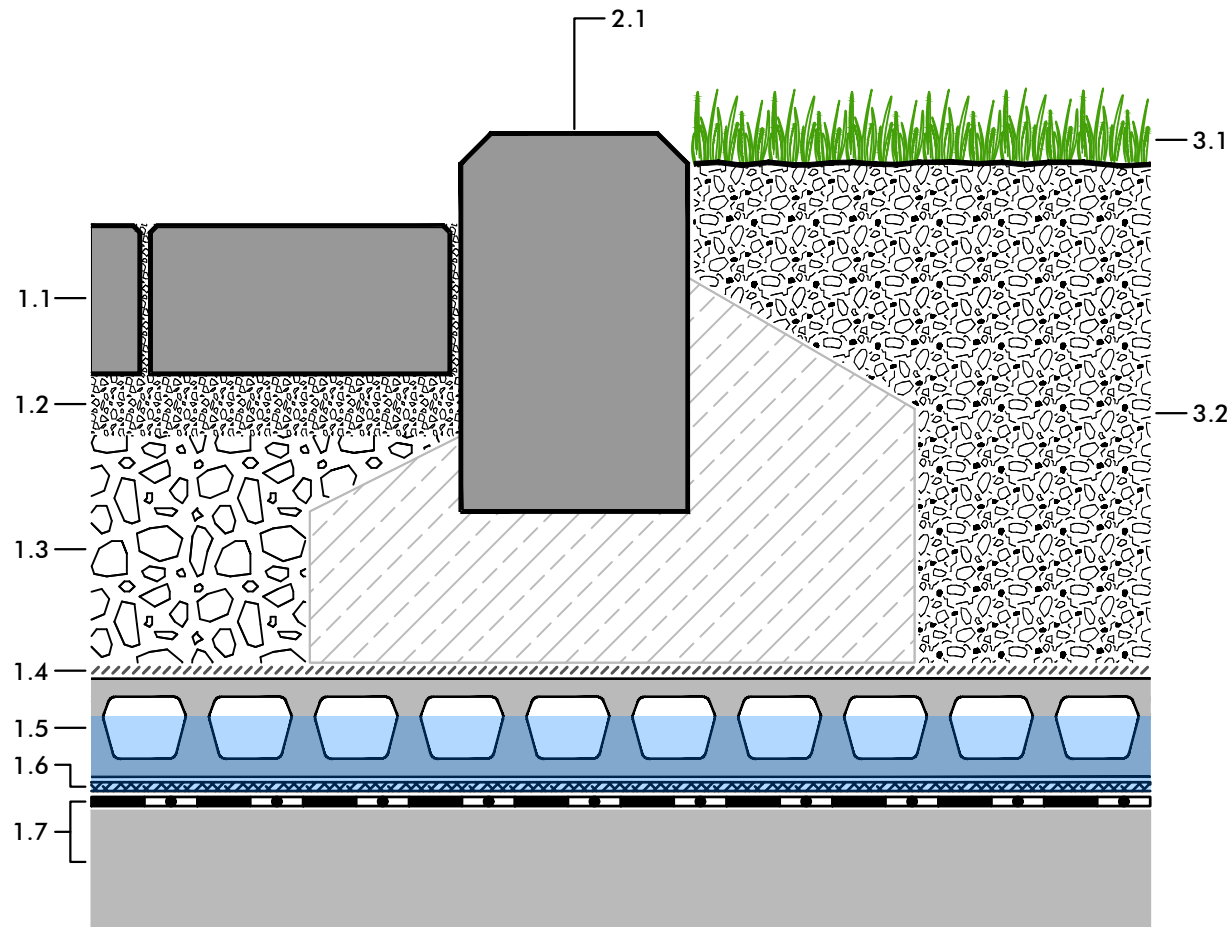

2.1 Edging, e.g. concrete kerb in reinforced concrete foundation

3.1 Lawn, perennials, with sufficient substrate depth also shrubs and small trees

3.2 System substrate "Roof Garden" or System Substrate "Lawn", ≥ 200 mm

For total substrate depth exceeding 350 mm in project specific combination with Zincolit® Plus as mineral sub-substrate