


"Walk- and Driveway" with Stabilodrain® SD 30 on Inverted Roof

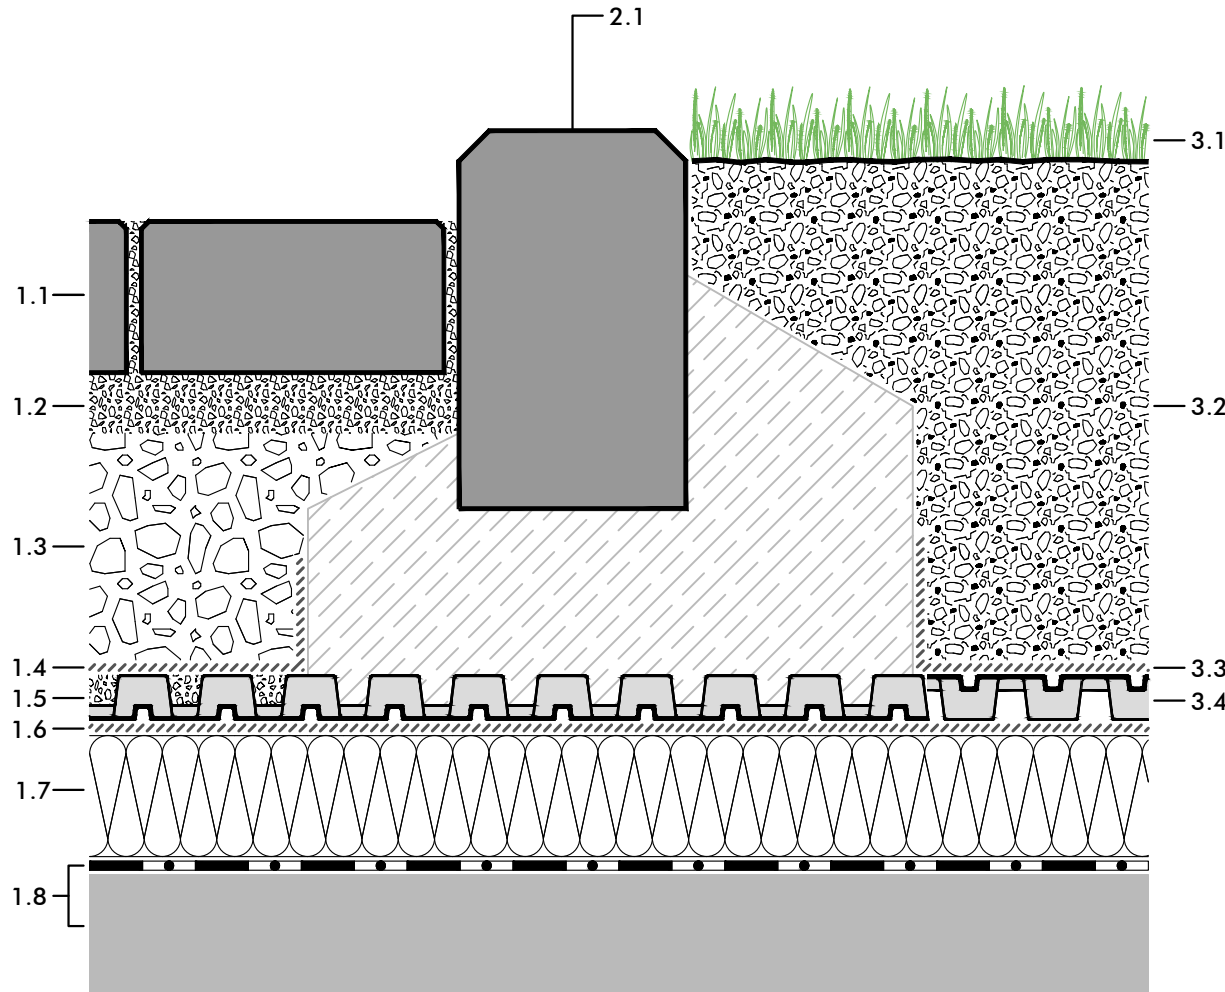

2.1 Edging, e.g. concrete kerb in reinforced concrete foundation

3.1 Lawn, perennials, and with sufficient substrate depth also shrubs and small trees

3.2 System Substrate "Roof Garden" or System Substrate "Lawn", ≥ 200 mm.
For total substrate depth exceeding 350-400 mm:
in project specific combination with mineral sub-substrate 'Zincolit Plus'

3.3 Filter Sheet TG

3.4 Stabilodrain® SD 30

Detail:

Edging between Hard Landscape and Vegetation

System build-up

1.1 Paving, e.g. concrete pavers

Depth: ≥ 100 mm for cars up to 3 t
 ≥ 120 mm for lorries up to 16 t
 ≥ 140 mm for lorries exceeding 16 t

1.2 Bedding layer, stone chippings, poor in lime, 30-50 mm

1.3 Compacted base layer, e.g. gravel, poor in lime

Depth: ≥ 150 mm for cars up to 3 t
 ≥ 200 mm for lorries up to 16 t
 ≥ 250 mm for lorries exceeding 16 t

1.4 Filter Sheet PV

1.5 Stabilodrain® SD 30, filled with stone chippings (see 1.2)

1.6 Filter Sheet PV

1.7 XPS insulation

1.8 Roof construction with suitable water proofing

Note:

The detailed solution shown here refers mainly to the ZinCo System Build-up. The roof construction itself as well as any other constructions are shown schematically and must be planned according to the relevant standards and guidelines.

Project:

-

Version:

29.11.2018 PBi/ EVo

Reviewed:

-

Scale:

none

Size:

A 4

Abgr01_G+F_SD30_Ukd.dwg

Authorized by ZinCo GmbH, Lise-Meitner-Str. 2,
72622 Nuertingen/ Germany; Tel: +49/7022-6003-0
info@zinco-greenroof.com; www.zinco-greenroof.com

Subject to technical alterations and printing errors.

