


"Walkway" with Elefeet®

Detail:
Edging between Paving and Greenery with Concrete
Kerb and Edge Retainer

System build-up

- 1.1 Concrete or natural stone slabs, $d \geq 40$ mm *)
- 1.2 Elefeet® Pedestal, height adjustable
(The integrated joint spacer partly need to be removed and if necessary, be replaced by additional joint spacers.)
- 1.3 Elastosafe ES 30
(additional separating layer, e.g. TGF 20 or TGV 21 in case of material incompatibility, where applicable)
- 1.4 Suitable roof construction with root resistant waterproofing (with pressure resistant insulation, if required)

*) Other slab heights are possible if approved by the manufacturer.
Maximum Elefeet® spacing (axial dimension):
600 x 600 mm

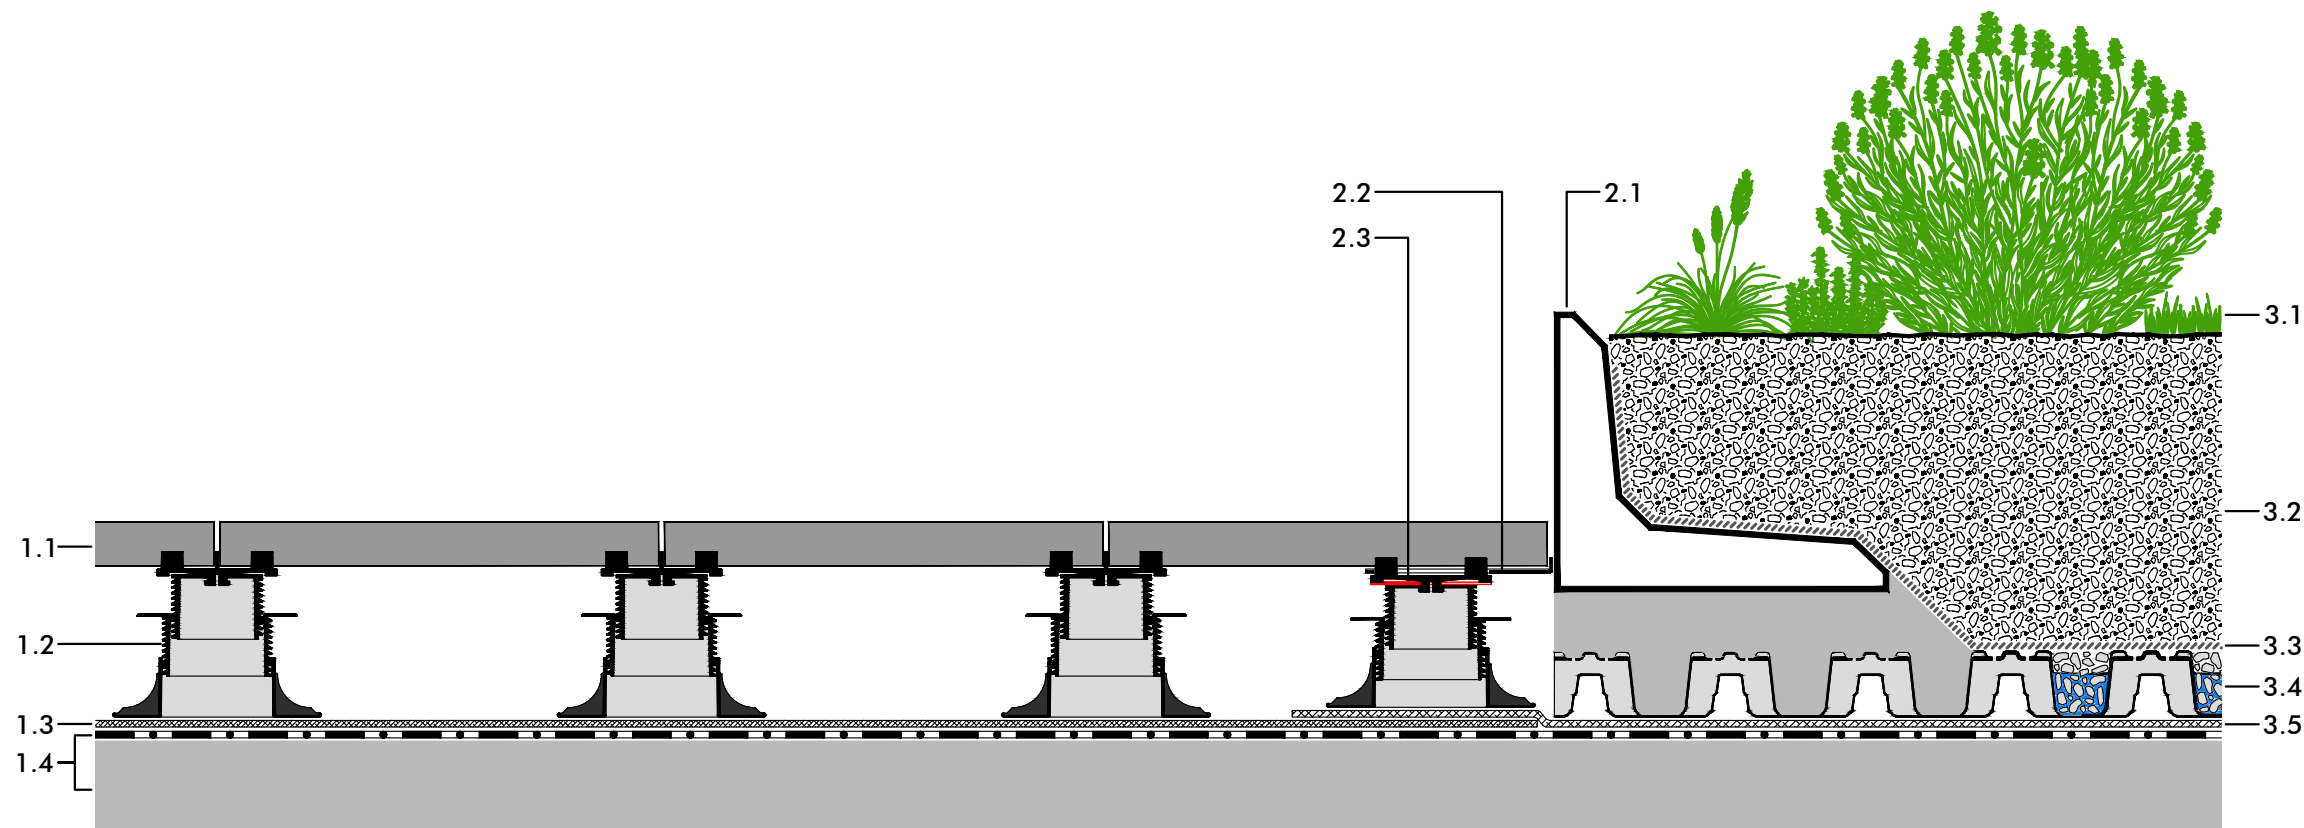

- 2.1 Zinco Concrete Kerb in concrete foundation (e.g. C 20/25)
- 2.2 Edge Retainer
- 2.3 Elefeet® Locking Disc

- 3.1 Lawn, perennials, with sufficient substrate depth also shrubs and small trees
- 3.2 System Substrate "Roof Garden" or System Substrate "Lawn", ≥ 200 mm, for total substrate depth exceeding 350 mm in project specific combination with mineral sub-substrate Zincolit® Plus
- 3.3 Filter Sheet SF
- 3.4 Floradrain® FD 60 neo, filled with ca. 27 l/m² Zincolit® Plus
- 3.5 Protection Mat ISM 50

Note:
The detailed solution shown here refers mainly to the ZinCo System Build-up. The roof construction itself as well as any other constructions are shown schematically and must be planned according to the relevant standards and guidelines.

Project:
-

| Version: | Reviewed: | Scale: | Size: |
|---------------------|-----------|--------|-------|
| 11.01.2019 JGI/ EVo | - | none | A 3 |

Abgr02_G+F_GehB_Elef_Fd0.dwg

Authorized by ZinCo GmbH, Lise-Meitner-Str. 2,
72622 Nuertingen/ Germany; Tel: ++49/7022-6003-0
info@zinco-greenroof.com; www.zinco-greenroof.com

Subject to technical alterations and printing errors.

