




- 2.1 Roof penetration
- 2.2 Gravel strip
- 2.3 Shear barrier
- 2.4 Elastodrain EL 202 Strip
- 2.5 Protection Mat SSM 45
- 2.6 Protection Mat WSM 150

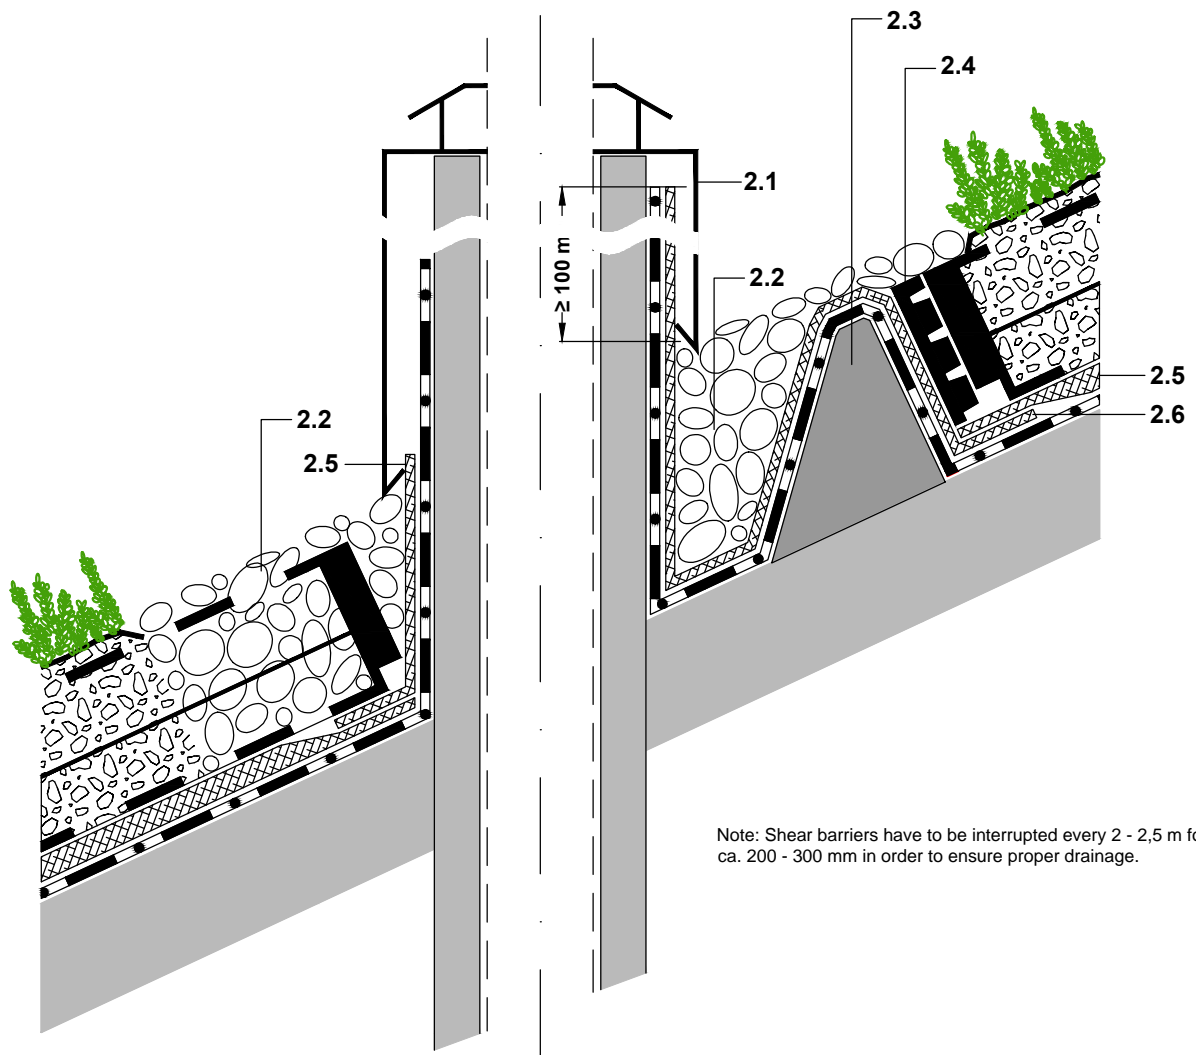

Note: Shear barriers have to be interrupted every 2 - 2,5 m for ca. 200 - 300 mm in order to ensure proper drainage.

PLEASE NOTE:
 THIS DETAILED SOLUTION MAINLY REFERS TO THE GREEN ROOF SYSTEM. THE ROOF CONSTRUCTION IS ONLY SCHEMATIC.
 THE DIMENSIONS SHOWN ARE REQUIRED DIMENSIONS FOR THE ZINCO GREEN ROOF SYSTEM.
 IN SOME CASES, LOCAL CODES AND STANDARDS MAY REQUIRE GREATER DIMENSIONS FOR A PARTICULAR APPLICATION.
 THE DESIGNER / PLANER MUST VERIFY COMPLIANCE WITH LOCAL CODES AND STANDARDS.



	Issued on: 04.07.2014	System: 'Pitched Green Roof' with Georaster®	Drawing title: Roof Penetration with Shear Barrier	Drawn by: pbi
	Modified: 01.08.2014 12:53		Job title: -STANDARD ARCHITECTURAL DETAIL-	Scale: 1:5
File: CAD_en_SPGR_Geor_Pr_Chimn01.dwg			Subject to technical alterations and printing errors; Authorized by ZinCo GmbH, 72622 Nuertingen, Germany Tel. ++49/7022/6003-100 Fax ++49/7022/6003-100, e-mail: info@zinco-greenroof.com, www.zinco-greenroof.com	