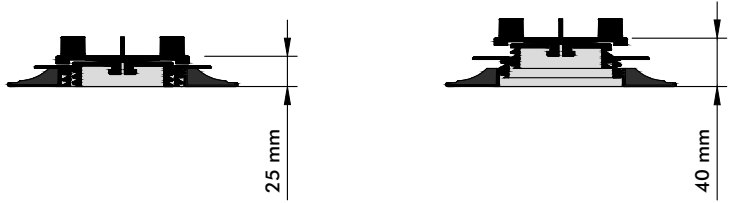
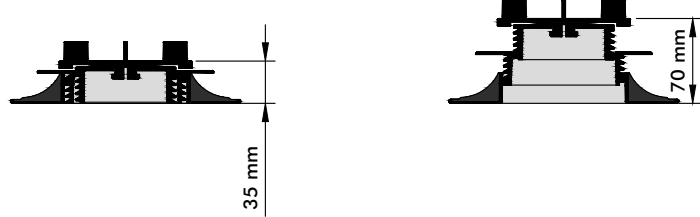
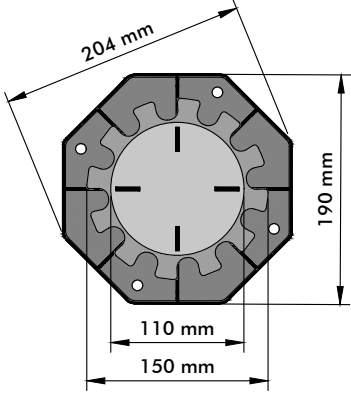
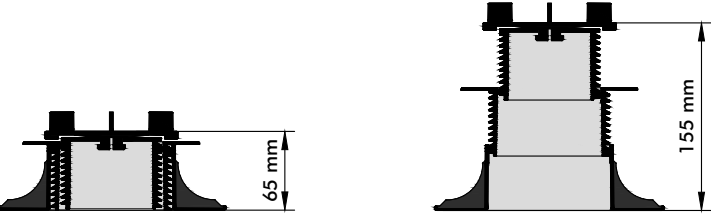
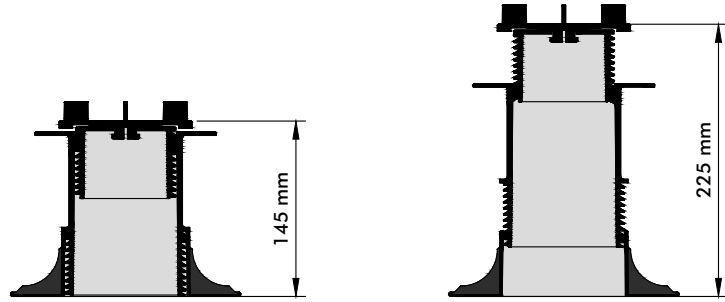

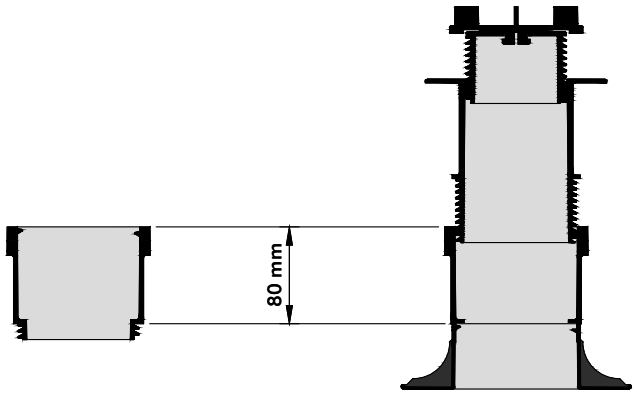
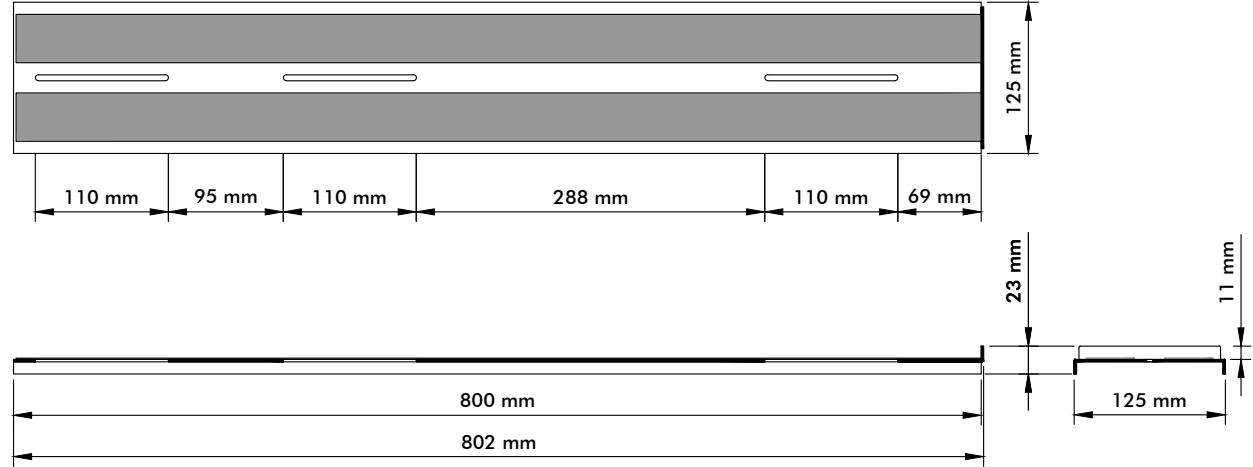
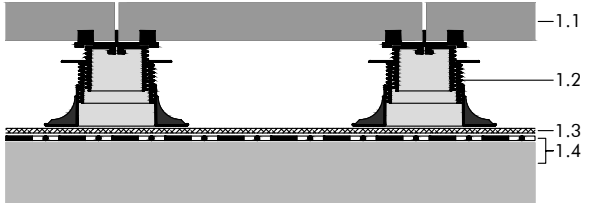
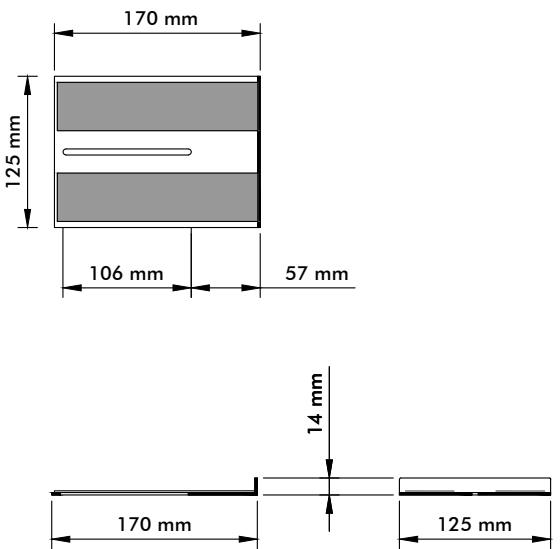
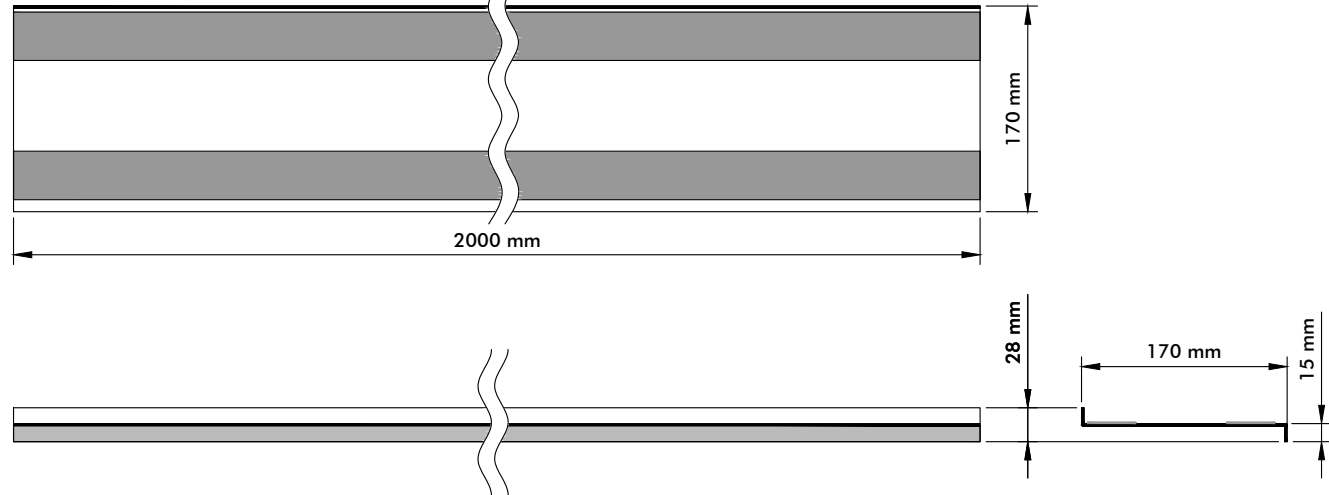


<p>H 25 (25 - 40 mm)</p>		<p>H 35 (35 - 70 mm)</p>		<p>Elefeet® seen from above</p>		<p>"Walkway" with Elefeet®</p>
<p>H 65 (65 - 155 mm)</p>		<p>H 145 (145 - 225 mm)</p>		<p>Locking Disc (when installed)</p>		<p>Detail: Overview Elefeet® Pedestals and Accessories</p> <p>System build-up</p> <ol style="list-style-type: none"> 1.1 Concrete or natural stone slabs, $d \geq 40$ mm *) 1.2 Elefeet® Pedestals, height adjustable (The integrated joint spacer partly need to be removed and if necessary, be replaced by additional joint spacers.) 1.3 Elastosafe ES 30 (additional separating layer, e.g. TGF 20 or TGV 21 in case of material incompatibility, where applicable) 1.4 Suitable roof construction with root resistant waterproofing (with pressure resistant insulation, if required) <p>*) Other slab heights are possible if approved by the manufacturer. Maximum Elefeet® spacing (axial dimension): 600 x 600 mm</p>
<p>Extension Piece A 80 (80 mm)</p>		<p>Cantilever Arm Support seen from above section/elevation</p>				
<p>Edge Retainer seen from above sections/ elevation</p>		<p>Mitre Cut Support seen from above section/elevation</p>			<p>Note: The detailed solution shown here refers mainly to the ZinCo System Build-up. The roof construction itself as well as any other constructions are shown schematically and must be planned according to the relevant standards and guidelines.</p> <p>Project: -</p> <p>Version: 14.01.2019 JGI/ EVo Reviewed: - Scale: none Size: A 3</p> <p>Elefeet_Übersicht.dwg</p> <p>Authorized by ZinCo GmbH, Lise-Meitner-Str. 2, 72622 Nuertingen/ Germany; Tel: +49/7022-6003-0 info@zinco-greenroof.com; www.zinco-greenroof.com</p> <p>Subject to technical alterations and printing errors.</p> 