

# "Walkway" with Elefeet®

**Detail:**

Wall Connection with Mitre Cut Support

**System build-up**

- 1.1 Concrete or natural stone slabs,  $d \geq 40 \text{ mm}$  \*)
- 1.2 Elefeet® Pedestals, height adjustable  
(The integrated joint spacer partly need to be removed and if necessary, be replaced by additional joint spacers.)
- 1.3 ES 30 (additional separating layer, e.g. TGF 20 Elastosafe or TGF 21 in case of material incompatibility, where applicable)
- 1.4 Suitable roof construction with root resistant waterproofing (with pressure resistant insulation, if required)

\*) Other slab heights are possible if approved by the manufacturer.  
Maximum Elefeet® spacing (axial dimension):  
600 x 600 mm

**Note:**

The detailed solution shown here refers mainly to the ZinCo System Build-up. The roof construction itself as well as any other constructions are shown schematically and must be planned according to the relevant standards and guidelines.

**Project:**

-

**Version:**

15.01.2019 JGI/ EVo

**Reviewed:**

-


**Scale:**

none

**Size:**

A 4

Wa03\_G+F\_Elef\_Fd.dwg

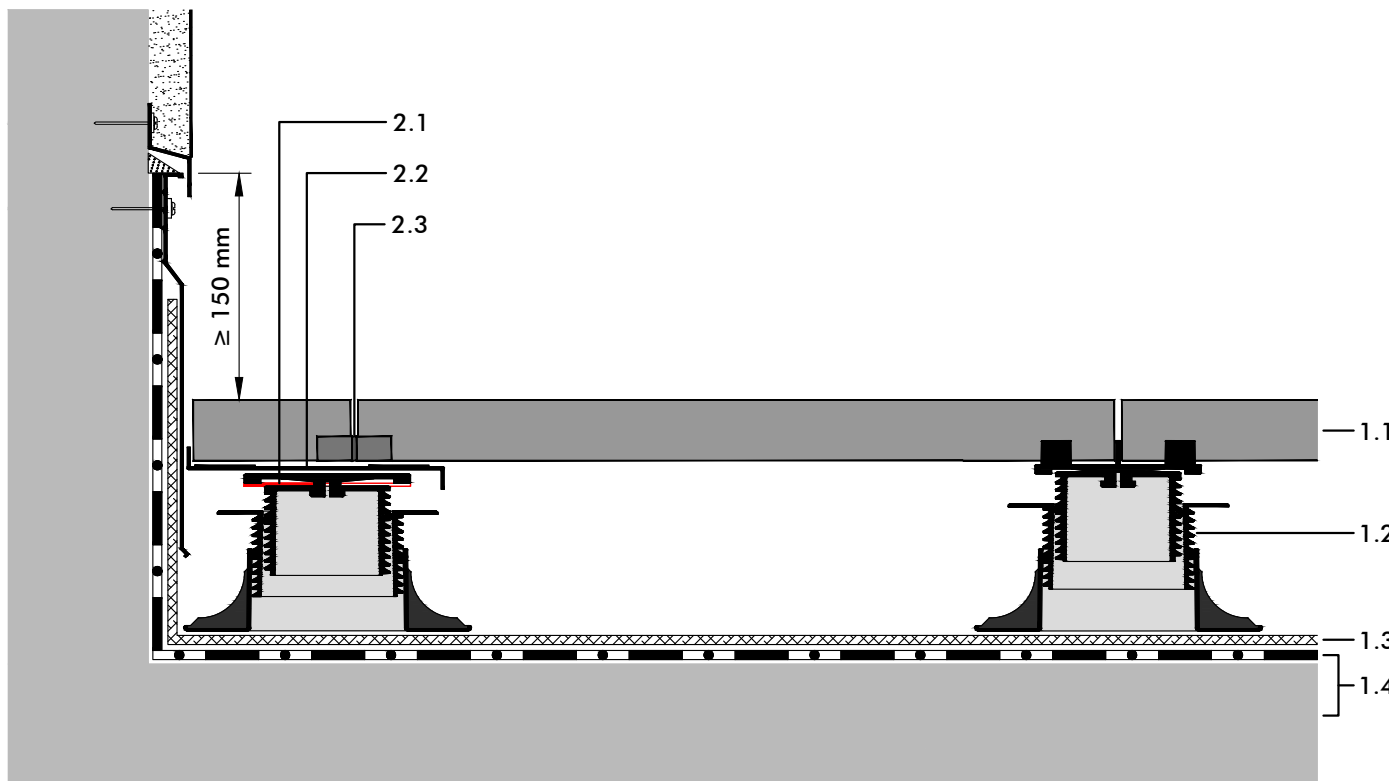

- 2.1 Locking Disc
- 2.2 Mitre Cut Support
- 2.3 Joint Spacer

Authorized by ZinCo GmbH, Lise-Meitner-Str. 2,  
72622 Nuertingen/ Germany; Tel: ++49/7022-6003-0  
info@zinco-greenroof.com; www.zinco-greenroof.com



Subject to technical alterations and printing errors.